

# New! High Quality Flammable Safety Cabinets




**DURHAM MFG<sup>®</sup>**  
Est. 1922

# DURHAM MFG<sup>®</sup>

Est. 1922



## FM Approved Flammable Safety Storage

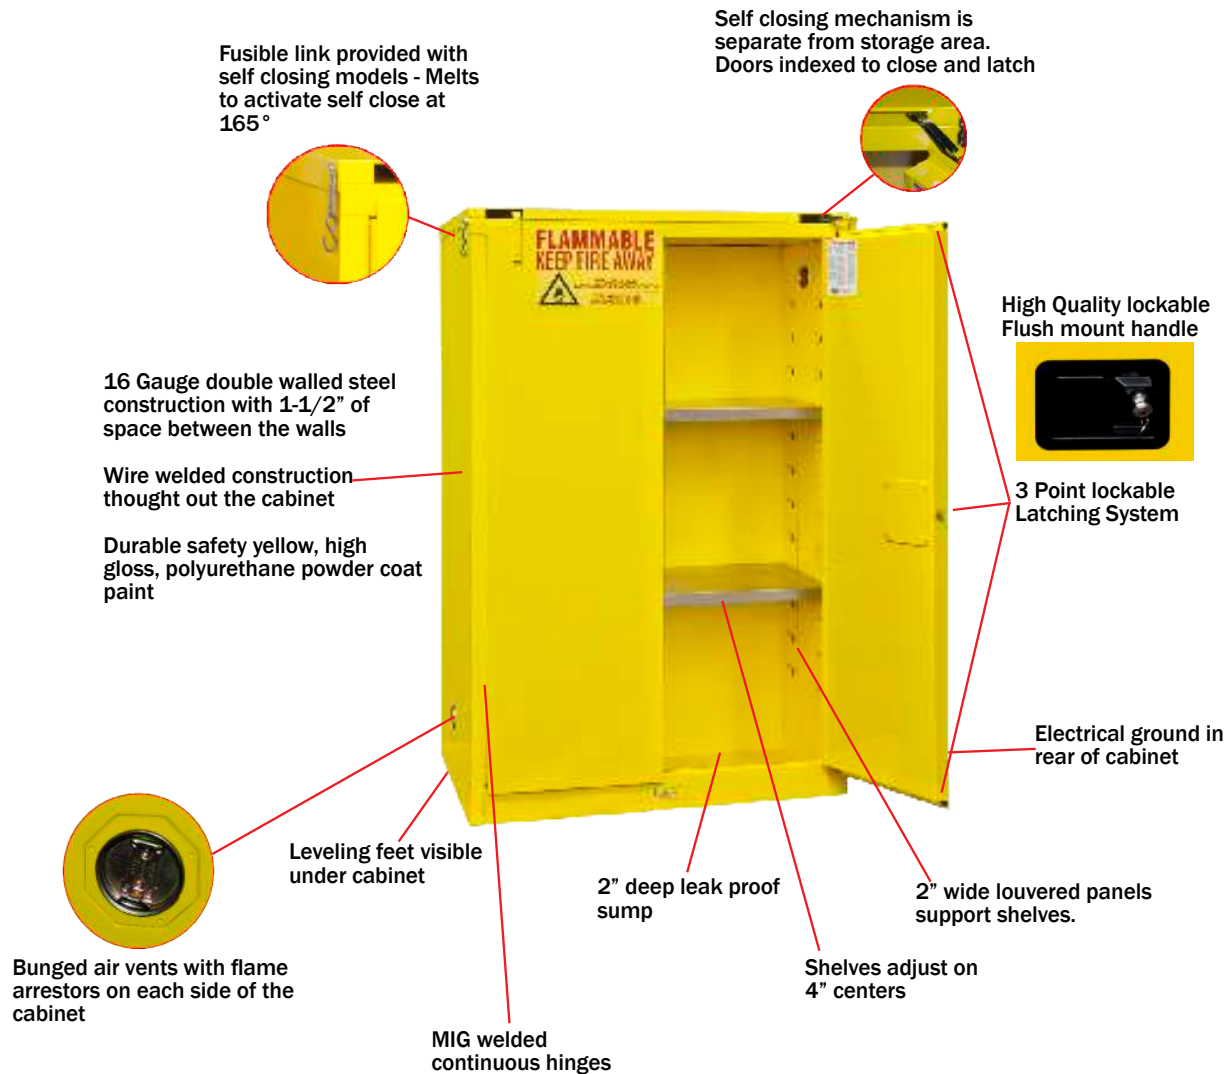

- All Flammable Cabinets are FM approved
- 90 Years of manufacturing safety equipment
- High quality self closing mechanism
- Improved security with recessed locking mechanism
- 10 year limited warranty

[www.durhammfg.com](http://www.durhammfg.com)

# DURHAM MFG®

Est. 1922



## FM Approved Flammable Safety Cabinet

- Sturdy all welded 16 gauge double wall steel construction
- Choice of manual or self closing doors
- 2" wide louvers support shelves, adjustable on 4" centers
- 2" Deep leak proof base
- Safely contains hazardous chemicals reducing the risk of fire
- Units come fully assembled and ready for use
- Electrical ground on bottom right hand side to aid in the elimination of an electrostatic discharge
- Improved security with recessed lockable paddle latch and 3 point locking system
- Bunged air vents on each side of the cabinet allows for ventilation
- Safety yellow powder coat finish

Model	Gallon Capacity (L)	Dimensions: In (mm) - WxDxH	Shelves	Optional Shelf Part #	Door Style	Ship Wt.
1012M-50	12 (45)	23" x 18" x 35" (584 x 457 x 889)	1	FS-SH-1419	Manual	159 lbs.
1012S-50	12 (45)	23" x 18" x 36-3/8" (584 x 457 x 924)	1	FS-SH-1419	Self Closing	167 lbs.
1030M-50	30 (114)	43" x 18" x 44" (1092 x 457 x 1118)	1	FS-SH-1439	Manual	285 lbs.
1030S-50	30 (114)	43" x 18" x 45-3/8" (1092 x 457 x 1153)	1	FS-SH-1439	Self Closing	309 lbs.
1045M-50	45 (170)	43" x 18" x 65" (1092 x 457 x 1651)	2	FS-SH-1439	Manual	409 lbs.
1045S-50	45 (170)	43" x 18" x 66-3/8" (1092 x 457 x 1686)	2	FS-SH-1439	Self Closing	423 lbs.
1060M-50	60 (227)	34" x 34" x 65" (864 x 864 x 1651)	2	FS-SH-2930	Manual	509 lbs.
1060S-50	60 (227)	34" x 34" x 66-3/8" (864 x 864 x 1686)	2	FS-SH-2930	Self Closing	533 lbs.
1090M-50	90 (340)	43" x 34" x 65" (1092 x 864 x 1651)	2	FS-SH-2939	Manual	587 lbs.
1090S-50	90 (340)	43" x 34" x 66-3/8" (1092 x 864 x 1686)	2	FS-SH-2939	Self Closing	623 lbs.

[www.durhammfg.com](http://www.durhammfg.com)



## FM Approved 4 & 12 Gallon Flammable Safety Storage



Flammable Safety Cabinet  
(Holds 4 Gallons)



- Sturdy all welded 16 gauge double wall steel construction
- 2" wide louvers support shelves, adjustable on 4" centers
- 2" Deep leak proof base
- Safely contains hazardous chemicals reducing the risk of fire
- Improved security with recessed lockable paddle latch and 3 point locking system
- Bunged air vents on each side of the cabinet allows for ventilation
- Size perfectly for tabletop use
- Safety yellow powder coat finish

Model	Gallon Capacity (L)	Dimensions(WxDxH): In (mm)	Shelves	Optional Shelf Part #	Door Style	Ship Wt.
1004M-50	4 (15)	17-3/8 x 18-1/8 x 22-1/8 (442 x 461 x 562)	1	FS-SH-1413	Manual	104 lbs.
1004S-50	4 (15)	17-3/8 x 18-1/8 x 23-3/8 (442 x 461 x 593)	1	FS-SH-1413	Self Closing	110 lbs.

Flammable Safety Cabinet  
(Holds 12 Gallons - Horizontal)



- Sturdy all welded 16 gauge double wall steel construction
- 2" wide louvers support shelves, adjustable on 4" centers
- 2" Deep leak proof base
- Safely contains hazardous chemicals reducing the risk of fire
- Improved security with recessed lockable paddle latch and 3 point locking system
- Bunged air vents on each side of the cabinet allows for ventilation
- Safety yellow powder coat finish

Model	Gallon Capacity (L)	Dimensions: In (mm)	Shelves	Optional Shelf Part #	Door Style	Ship Wt.
1012MH-50	12 (45)	43 1/8" x 18 1/8" x 18 1/8" (1095 x 461 x 461)	1	FS-SH-1439	Manual	165 lbs.

# DURHAM MFG®

Est. 1922



**NEW**



## FM Approved Flammable Safety Cabinet with Legs

- Sturdy all welded 16 gauge double wall steel construction
- Choice of manual or self closing doors
- 2" wide louvers support shelves, adjustable on 4" centers
- 2" Deep leak proof base
- Safely contains hazardous chemicals reducing the risk of fire
- Electrical ground on bottom right hand side to aid in the elimination of an electrostatic discharge
- Units come fully assembled and ready for use
- Improved security with recessed lockable paddle latch and 3 point locking system
- 6" Box style legs allows for lagging to the floor, moving with forklift, and cleaning under the cabinet
- Bunged air vents on each side of the cabinet allows for ventilation
- Safety yellow powder coat finish

Model	Gallon Capacity (L)	Dimensions: In (mm) - WxDxH	Shelves	Optional Shelf Part #	Door Style	Ship Wt.
1012ML-50	12 (45)	23" x 18" x 41" (584 x 457 x 1041)	1	FS-SH-1419	Manual	178 lbs.
1012SL-50	12 (45)	23" x 18" x 42-3/8" (584 x 457 x 1076)	1	FS-SH-1419	Self Closing	186 lbs.
1030ML-50	30 (114)	43" x 18" x 50" (1092 x 457 x 1270)	1	FS-SH-1439	Manual	304 lbs.
1030SL-50	30 (114)	43" x 18" x 51-3/8" (1092 x 457 x 1302)	1	FS-SH-1439	Self Closing	328 lbs.
1045ML-50	45 (170)	43" x 18" x 71" (1092 x 457 x 1803)	2	FS-SH-1439	Manual	428 lbs.
1045SL-50	45 (170)	43" x 18" x 72-3/8" (1092 x 457 x 1838)	2	FS-SH-1439	Self Closing	442 lbs.
1060ML-50	60 (227)	34" x 34" x 71" (864 x 864 x 1803)	2	FS-SH-2930	Manual	542 lbs.
1060SL-50	60 (227)	34" x 34" x 72-3/8" (864 x 864 x 1838)	2	FS-SH-2930	Self Closing	566 lbs.
1090ML-50	90 (340)	43" x 34" x 71" (1092 x 864 x 1803)	2	FS-SH-2939	Manual	620 lbs.
1090SL-50	90 (340)	43" x 34" x 72-3/8" (1092 x 864 x 1838)	2	FS-SH-2939	Self Closing	656 lbs.

[www.durhammfg.com](http://www.durhammfg.com)

# DURHAM MFG<sup>®</sup>

## Est. 1922

### Durham Manufacturing

The Durham Manufacturing Company was founded in 1922, in Durham Connecticut. The company manufactures steel and plastic material handling and storage products for the Industrial, Commercial, Safety and Office Furniture markets. The company operates two manufacturing facilities in Durham, Connecticut and Juarez, Mexico. The Company's vision is to manufacture welded industrial storage and material handling products.

The Company is a sheet metal fabricator that converts its raw materials into numerous industrial storage products through shearing, stamping, forming, welding, painting and packaging of steel sheet product. It also produces injected molded plastic component parts and first aid kits.

### NFPA Code 30 and OSHA 1910.106

In brief:

NFPA Code 30 and OSHA 1910.106 are similar standards that specify the construction of cabinets for Class I, II, and III liquids. NFPA is the abbreviation for the National Fire Prevention Association and OSHA is the abbreviation for the Occupational Safety and Hazard Act (or Administration). Both of these agencies require that a flammable safety cabinet must be made of double metal, a minimum of 18 gauge with a 1 1/2" air space between metals. There will be 2 inch capped vents with flash arrestors for external exhaust. They will have a three point latch and a 2 inch high leak proof door sill to contain spills. The cabinets are designed and constructed to limit the internal temperature at the center of the cabinet one inch from the top of the cabinet to not more than 325° F when subjected to a 10 minute fire test.

### FM Approval

Associated Factory Mutual Fire Insurance is now known as FM Global. FM is an insurance company that also provides an auditing procedure to insure that a product conforms to the specifications required. In the case of Durham's flammable storage cabinets, FM certifies that our cabinet conforms to NFPA 30 and OSHA 1910.106.

They have reviewed our manufacturing process and have performed the fire test. Durham manufacturing cabinets are "FM APPROVED"

Distributed By: